

树形屏 Tree shape LED display

产品特点 /Product features


无缝拼接：采用定制模组尺寸，可以实现无缝拼接；
Seamless splicing: by custom size LED module, can realize seamless splicing;

均匀抽点：支持均匀抽点技术，显示画面不失真；
Uniform pixel omitting technology: even pixel omitting without image distortion;

控制灵活：同异步兼容，支持脱机与联机两种方式；
Flexible control: Synchronous and asynchronous compatible, supporting offline and online mode;

技术参数 Technical Parameters

产品型号 Model	P3
灯珠型号 LED type	SMD2121
点间距 Pixel pitch	3mm
扫描数 Scan rate	16 扫
分辨率 Resolution	160000
最小视距 Minimum viewing distance (m)	3
亮 度 Brightness (CD/ m ²)	800
灰度等级 Gray scale	16bit
播放模式 Display mode	Synchronous with video source
刷新频率 Refresh rate	≥ 1920HZ
视 角 Viewing angle	H/160,V/140
工作湿度 Ambient Humidity	10%-99%
最大功耗 Max.power consumption	800W
平均功耗 Ave.power consumption	400W
平均无故障时间 MTBF	> 10000 hours
输入电压 Input power	AC110V /220V

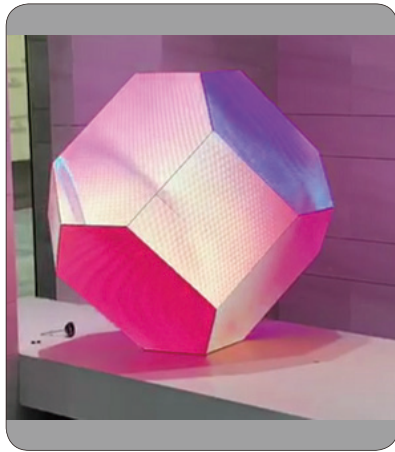

六边形 LED 显示屏 Hexagon shape LED screen


产品特点 /Product features

六边形 LED 显示屏，六边形 LED 显示屏，因为独特的造型受到了市场的青睐，它可以任意组合成不同形状，替代传统灯箱广告，并广泛应用于室内装饰，广告，和舞美设计，满足用户多样化、个性化、定制化的需求。



The hexagonal shape LED screen, with its creative shape, is popular in the market. It can be used to form different layout and shapes, which can be used to replace traditional light box, and also can be widely used for interior decoration, advertising, and stage design, meeting clients' diverse, personalized and creative design requirements.

技术参数 Technical Parameters

产品型号 Model	P3
灯珠型号 LED type	SMD2121
点间距 Pixel pitch	3mm
扫描数 Scan rate	16 扫
分辨率 Resolution	111111
最小视距 Minimum viewing distance (m)	3
亮 度 Brightness (CD/ m ²)	800
灰度等级 Gray scale	16bit
播放模式 Display mode	Synchronous with video source
刷新频率 Refresh rate	≥ 1920HZ
视 角 Viewing angle	H/160,V/140
工作湿度 Ambient Humidity	10%-99%
最大功耗 Max.power consumption	800W
平均功耗 Ave.power consumption	400W
平均无故障时间 MTBF	> 10000 hours
输入电压 Input power	AC110V /220V

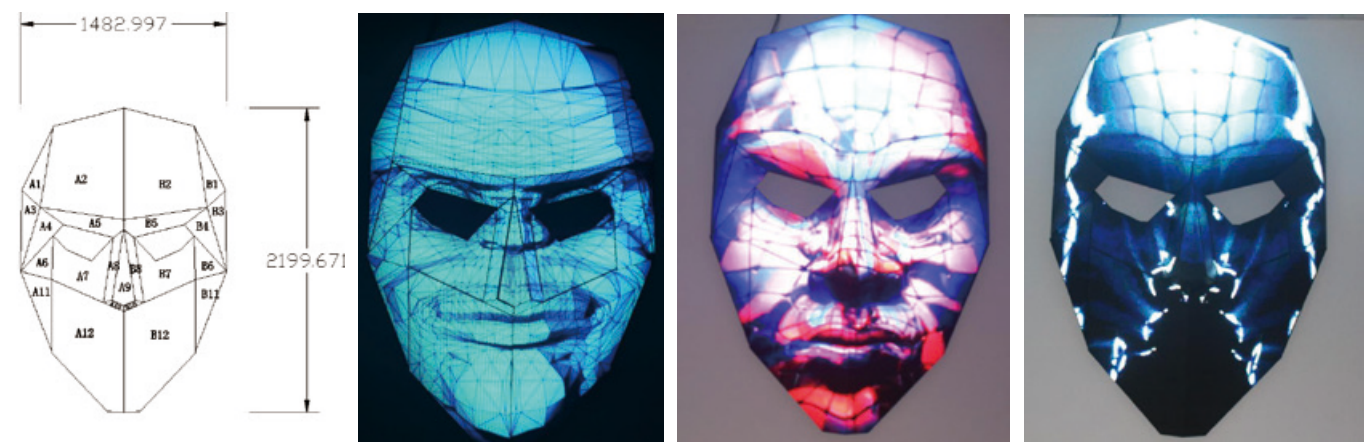

面具屏 LED mask display

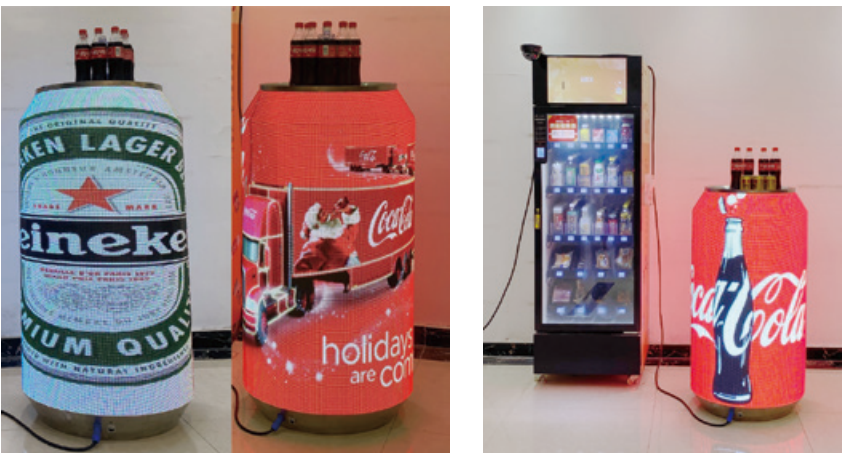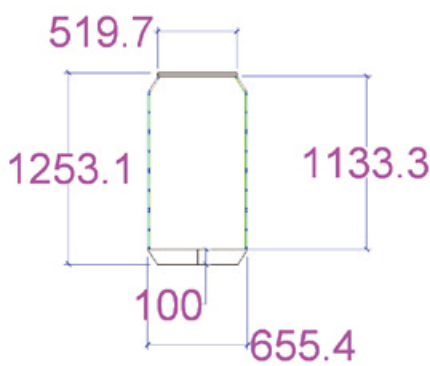

可乐屏 Cola Can Shape LED display

产品特点 /Product features

采用优质 SMD 光源 LED
Adopted high-quality SMD light source of led

高刷新无拖尾 High refresh rate

酒吧、商场、演出、活动等的理想选择
Ideal choice for event,bar,shopping malls,club ect.

产品特点 /Product features

防炫、防反光独特光学设计；
Unique optical design for anti-glare and anti-reflective;

弧度、颜色、安装结构可定制。
The curvature, color and installation structure can be customized.



技术参数 Technical Parameters

产品型号 Model	P4
灯珠型号 LED type	SMD2121
点间距 Pixel pitch	4mm
扫描数 Scan rate	16 扫
分辨率 Resolution	62500
最小视距 Minimum viewing distance (m)	4
亮 度 Brightness (CD/ m ²)	800
灰度等级 Gray scale	16bit
播放模式 Display mode	Synchronous with video source
刷新频率 Refresh rate	≥ 1920HZ
视 角 Viewing angle	H/160,V/140
工作湿度 Ambient Humidity	10%-99%
最大功耗 Max.power consumption	800W
平均功耗 Ave.power consumption	400W
平均无故障时间 MTBF	> 10000 hours
输入电压 Input power	AC110V /220V

技术参数 Technical Parameters

品名 product name	可乐罐 cola can LED display
LED 规格 LED lamp	SMD2121
像素密度 Pixel density(dot/m ²)	62500
像素间距 Pixel pitch	4mm
最佳可视距离 best viewing distance (m)	4--40
最大功耗 max.power consumption (KW)	0.3
扫描方式 Scan mode	16 扫 ; 1/16 scan
亮 度 brightness (CD/ m ²)	1200nits
视 角 View angle	H 360 ° V 360 °
工作温度 Working temperature	-20 ~ 60℃
工作湿度 operation Humidity	10% ~ 90% RH
刷新频率 Refresh Rate	≥ 1920HZ
输入电压 Input Voltage	AC220V/110V ± 15% 47 ~ 64HZ


大夜精灵 DJ 台 Big night elves LED DJ booth

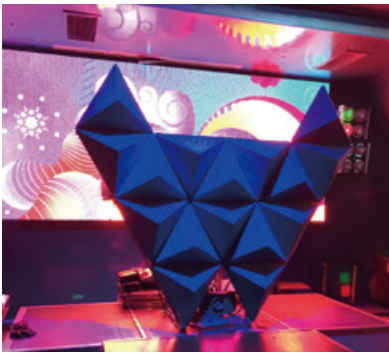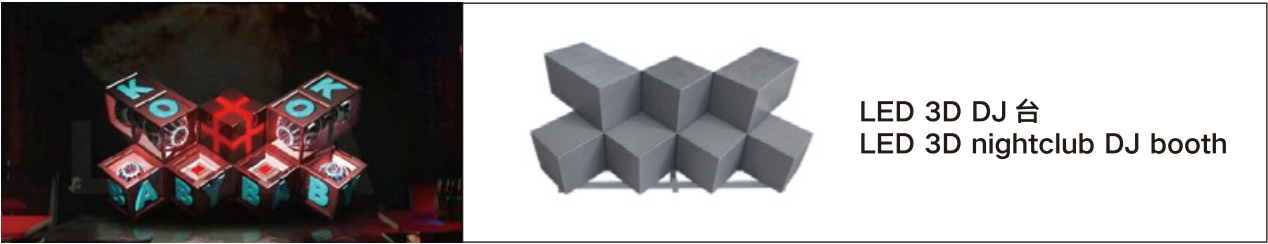

大夜精灵 DJ 台
Big night elves LED DJ booth



魔幻 DJ 台
Fantasy LED display

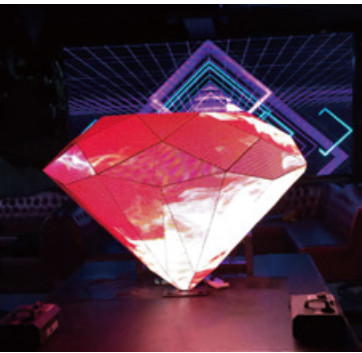

钻石 LED DJ 屏
Diamond LED DJ booth

魔幻 DJ 台 Fantasy LED display

技术参数 Technical Parameters	
产品型号 Model	P5
灯珠型号 LED type	SMD2121
点间距 Pixel pitch	5mm
扫描数 Scan rate	16 扫
分辨率 Resolution	40000
最小视距 Minimum viewing distance (m)	5
亮 度 Brightness (CD/ m ²)	800
灰度等级 Gray scale	16bit
播放模式 Display mode	Synchronous with video source
刷新频率 Refresh rate	≥ 1920HZ
视 角 Viewing angle	H/160,V/140
工作湿度 Ambient Humidity	10%-99%
最大功耗 Max.power consumption	800W
平均功耗 Ave.power consumption	400W
平均无故障时间 MTBF	> 10000 hours
输入电压 Input power	AC110V /220V

钻石 LED DJ 屏 Diamond LED DJ booth

技术参数 Technical Parameters	
产品型号 Model	P4
灯珠型号 LED type	SMD2121
点间距 Pixel pitch	4mm
扫描数 Scan rate	16 扫
分辨率 Resolution	62500
最小视距 Minimum viewing distance (m)	4
亮 度 Brightness (CD/ m ²)	800
灰度等级 Gray scale	16bit
播放模式 Display mode	Synchronous with video source
刷新频率 Refresh rate	≥ 1920HZ
视 角 Viewing angle	H/160,V/140
工作湿度 Ambient Humidity	10%-99%
最大功耗 Max.power consumption	800W
平均功耗 Ave.power consumption	400W
平均无故障时间 MTBF	> 10000 hours
输入电压 Input power	AC110V /220V



漏斗屏 Funnel shape LED display

产品特点 /Product features

人性化设计，电源和系统一体集成
Humanized design, integrated power supply and system

安装简单方便可悬挂式和落地式安装
Easy installation, support hanging and floor stand installation




可倒立可正立均匀抽点设计
Custom program design, uniform pixel omitting

画面均匀显示
No image distortion

技术参数 Technical Parameters

产品型号 Product Model	P4
LED 规格 LED standard	SMD2121
像素密度 Pixel density(dot/m ²)	62500
像素间距 Pixel pitch	4mm
最小视距 Minimum viewing distance (m)	4
最大功耗 Max power consumption (KW)	3.5
扫描方式 Scan mode	16 扫 ; 1/16 scan
亮 度 brightness (CD/ m ²)	> 1000nits
视 角 View angle	H 360 ° V 360 °
工作温度 Working temperature	-20 ~ 60℃
工作湿度 operation Humidity	10% ~ 90% RH
刷新频率 Refresh Rate	≥ 1920HZ
输入电压 Input Voltage	AC 220V/110V±15% 47 ~ 64HZ

任意直径圆 Any diameter round shape LED display

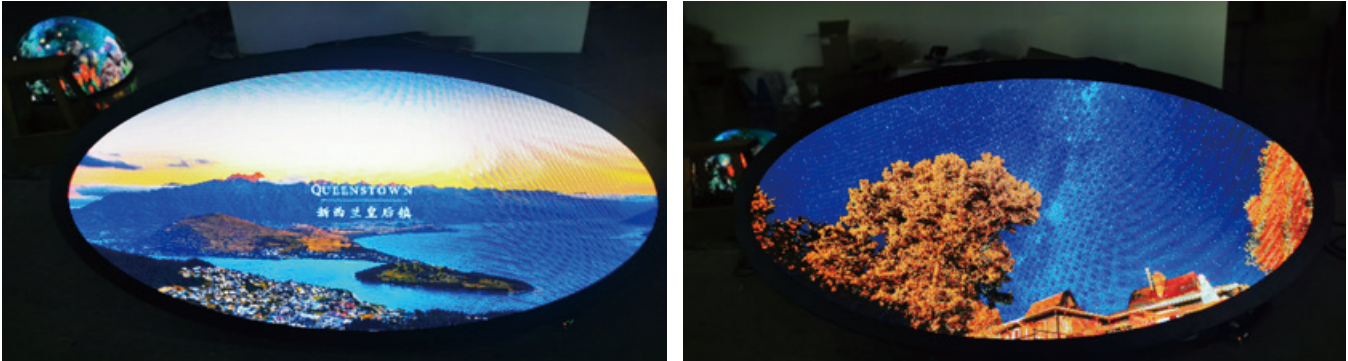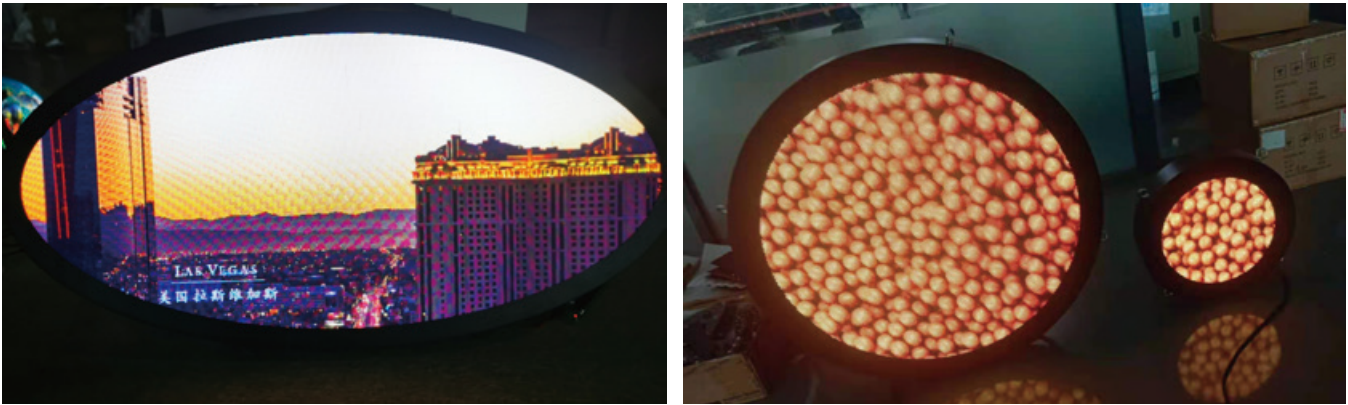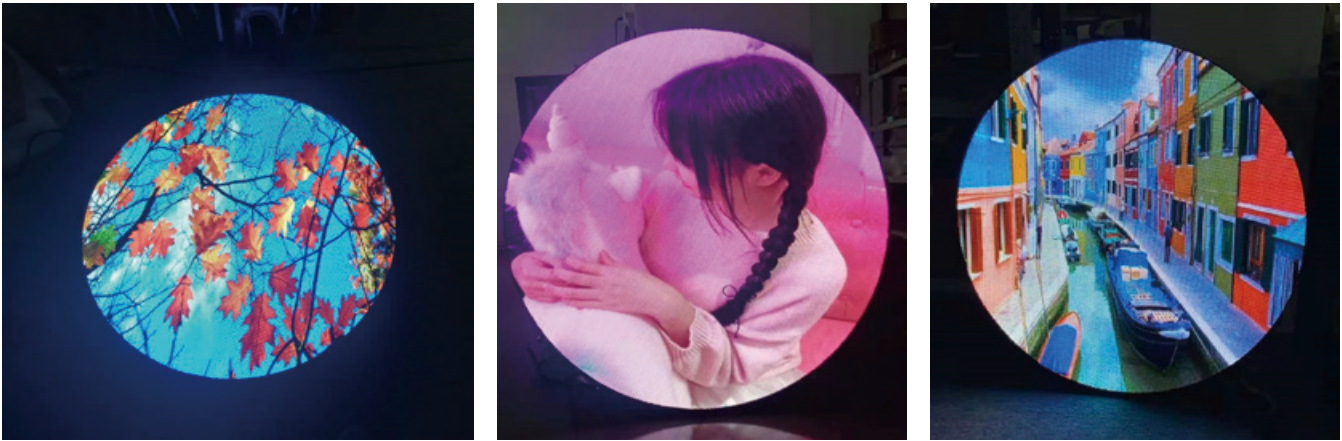



球形屏 Sphere LED display

产品特点 /Product features

异世界球形 LED 显示屏的可视角度为 360 度，全方位播放视频，无平面 LED 显示屏的视角问题；
360 degree viewing angle, can play any video or images on the surface of the sphere;


LED 球的直径可按客户要求设计、生产、球面完全由数控完成，精确的模组尺寸，保证了 LED 球整体弯曲率的一致性；
The diameter and pixel pitch can be customized according to clients' requirement. The sphere frame is made by precise CNC machine. And with precise module size to ensure seamless assembling.

球形 LED 显示屏具有重量轻，抗风性好、安装方便、散热性能好、前后维护方便、防水性能好、抗震性能好、辅助安装框架成本低、风扇静音等优点；
LED sphere display is light weight, wind resistant, good heat dissipation, and can be front service, fanless quiet design.

根据客户要求和现场环境，量身定制最合适的球形 LED 显示屏解决方案；
The solutions can be customized according to the job site condition.

室内产品系列参数 Indoor Specification				
产品型号 Product Model	P3	P4	P5	P6
LED 规格 LED standard	SMD1515	SMD2020	SMD2020	SMD2020
点间距 Pixel Pitch	2.9mm-3.2mm	3.91mm-4.1mm	4.9mm-5.1mm	5.9mm-6.1mm
驱动方式 Drive mode	恒流驱动，22 扫 1/22 scan	恒流驱动，22 扫 1/22 scan	恒流驱动，22 扫 1/22 scan	恒流驱动，22 扫 1/22 scan
亮度 Brightness	1000CD/ m²	1000CD/ m²	1000CD/ m²	1000CD/ m²
箱体材质 Box material	Iron	Iron	Iron	Iron
最大功率 Max power consumption	1000W/ m²	800W/ m²	800W/ m²	800W/ m²
平均功率 Average power consumption	320W/ m²	240W/ m²	240W/ m²	240W/ m²
刷新频率 Refresh rate	≥ 1920HZ			
防护等级 Protection Level	IP43			
灰度等级 Gray scale	12-16bit			

室外产品系列参数 outdoor Specification			
产品型号 Product Model	P6	P8	P10
LED 规格 LED standard	SMD2727	SMD2727	SMD3535
点间距 Pixel Pitch	5.9mm-6.1mm	7.9mm-8.1mm	9.9-10.1mm
驱动方式 Drive mode	恒流驱动，8 扫 1/8 scan	恒流驱动，8 扫 1/8 scan	恒流驱动，8 扫 1/4 scan
亮度 Brightness	≥ 5000CD/ m²	≥ 5000CD/ m²	≥ 5000CD/ m²
箱体材质 Box material	Iron	Iron	Iron
最大功率 Max power consumption	1000W/ m²	1000W/ m²	1000W/ m²
平均功率 Average power consumption	320W/ m²	320W/ m²	320W/ m²
刷新频率 Refresh rate	≥ 1920HZ		
防护等级 Protection Level	IP65		
灰度等级 Gray scale	12-16bit		

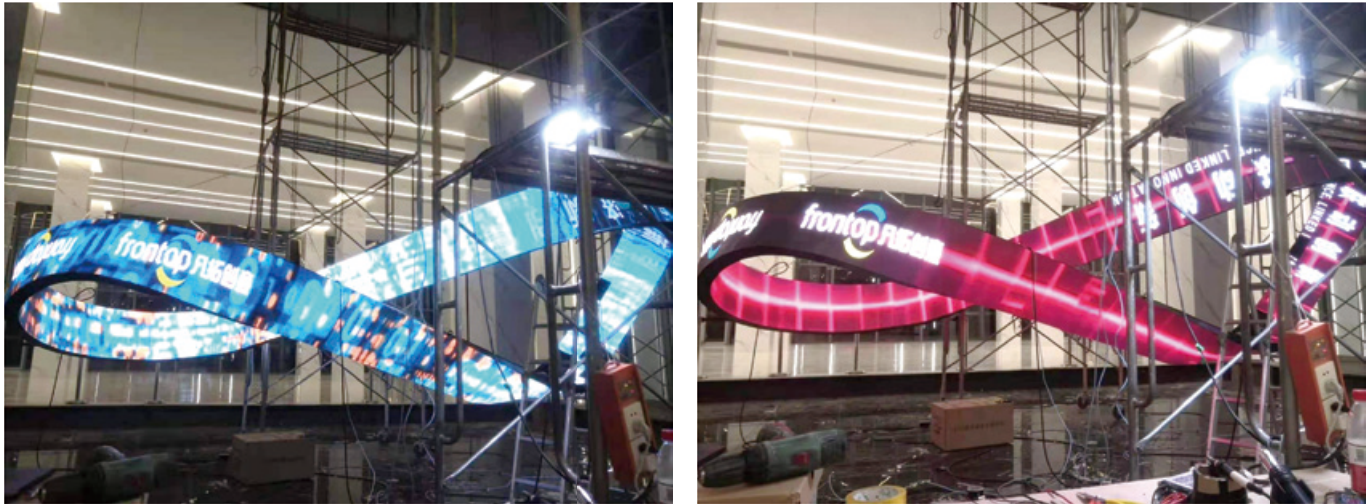


莫比乌斯环形屏 Mobius ring LED display

产品特点 /Product features

- 模组柔软，独特且易于安装 Flexible module design, unique and easy to install.
- 独特形状设计 Unique display shape
- 一体化电源盒设计节省维护时间 Integrated power and receiving card box design, save maintenance time
- 独特的模组设计，支持模组左右互换 Unique module design, support left and right interchanging
- 360 度观看视角 360 degree viewing angle

技术参数 Technical Parameters


产品型号 Product Model	P2.5
LED 规格 LED standard	SMD2121
像素密度 Pixel density(dot/m ²)	160000
像素间距 Pixel pitch	2.5mm
最小视距 Minimum viewing distance (m)	2.5
最大功耗 Max power consumption (KW)	8
扫描方式 Scan mode	16 扫 ; 1/16 scan
亮 度 brightness (CD/ m ²)	> 1000nits
视 角 View angle	H 360 ° V 360 °
工作温度 Working temperature	-20 ~ 60℃
工作湿度 operation Humidity	10% ~ 90% RH
刷新频率 Refresh Rate	≥ 1920HZ
输入电压 Input Voltage	AC 220V/110V ± 15% 47 ~ 64HZ

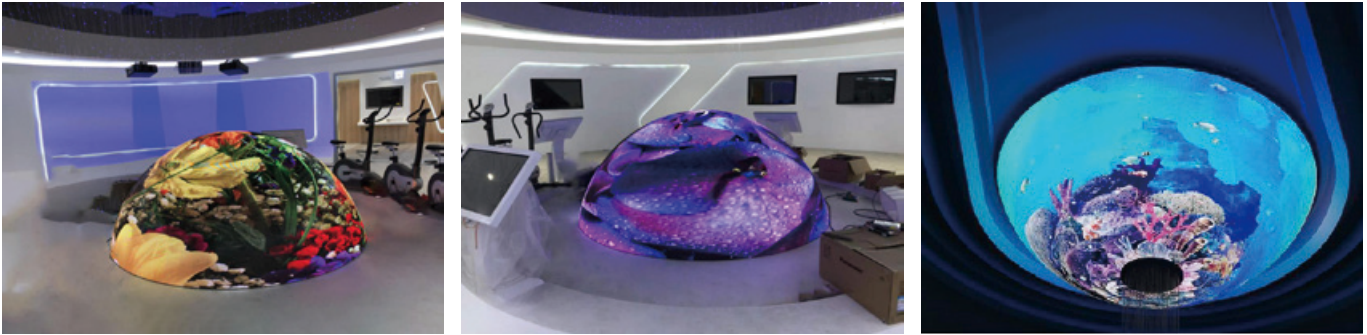

半球屏 Hemisphere LED display

产品特点 /Product features

- 半球屏以无拼缝、超宽视角、亮度均匀、不偏色的特点，广泛应用于企业展厅，商超，广告展示等行业。支持吊装及落地安装。
- The hemispherical LED screen is widely used for company showroom, shopping malls, advertising business .etc. with the features of seamless connection, ultra-wide viewing angle, uniform brightness and color. Support hanging or ground installation

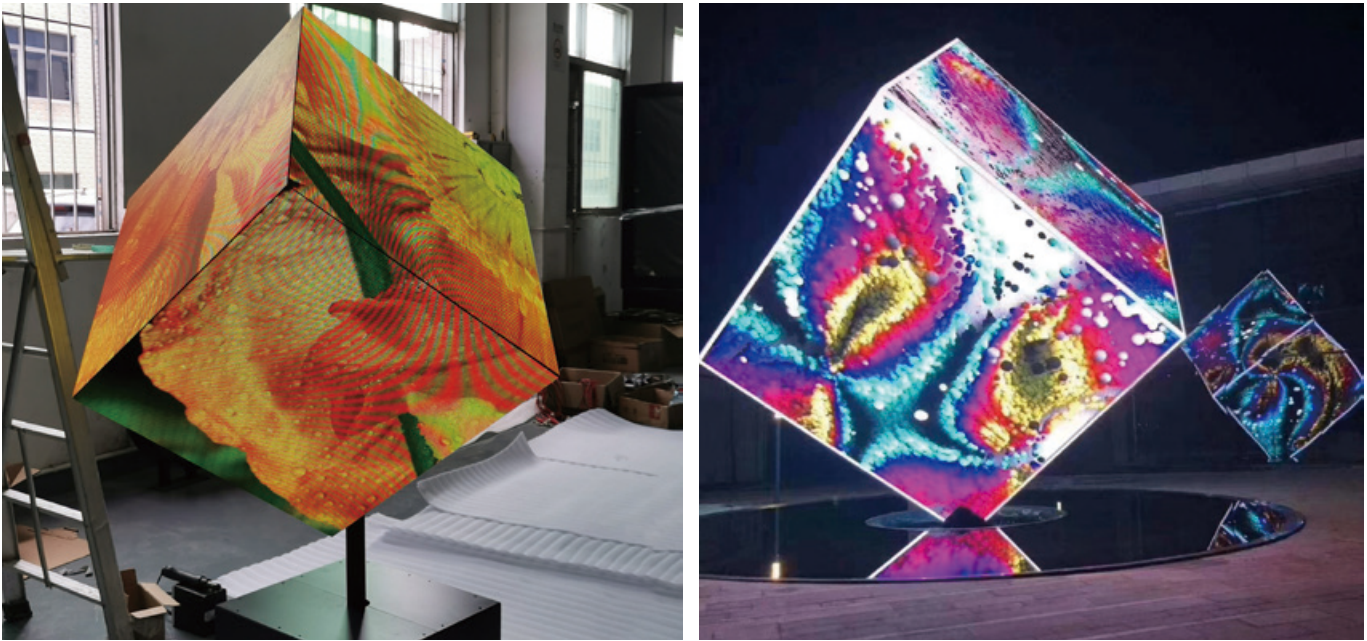

魔方屏 Rubik's Cube LED display

产品特点 /Product features

- 魔方屏 LED 显示屏适用于酒吧、主题公园、展览馆等场所。尤其是展览馆，十分应景。通过定制的素材，可以实现 3D 效果，内容丰富，表现力好。
- The Rubik's Cube LED display can be widely used for nightclubs, theme parks, and exhibition halls. By specially mapped video, it can also show 3D effects, which is more eye-catching and creative.



三面显圆环屏 Three sides show ring LED display

产品特点 /Product features

三面显圆环 LED 显示屏是采用特殊定制形状和尺寸的模组组成。产品广泛应用于酒吧天花，商场，机场广告等领域。因其外形优美、受众范围更广的特点广受客户青睐。研发工程师们大胆创新，对模组进行专业的开模，成功地实现了模组无缝拼接，360°无观察死角的画面展示美轮美奂，画面清晰自然，浑然天成。

The three-sided ring shape LED display is made by custom-designed shape and size led module. It is widely used for nightclub design, shopping malls, airport advertising and so on. It is popular with its beautiful appearance and wider viewing angle.



创意组合屏 creative LED sphere and pyramid combination

产品特点 /Product features

异形屏可以任意组合成为一个完整画面。例如球形与金字塔形组合，三角形与方形组合等等。通过创意组合，可以更好的展示设计师的创意。

Creative shape LED displays can be combined together to form other special shapes. Such as sphere shape and pyramid shape combination, triangle shape and square shape combination and so on. This way it show the designer's idea better.



球冠屏 Dome shape LED display

产品特点 /Product features

所谓球冠屏，就是球的一部分切面，数学领域将此定义为球冠，故名球冠屏。球冠屏可以做外球冠或内球冠。可以广泛应用于天花吊顶，墙面装饰，播放广告视频或企业形象。

The dome shape LED screen is section of the whole sphere. It can be made into inner dome or external dome, which can be used for ceiling or wall decoration, playing advertising video, showing company introduction video or culture.



喇叭屏 horn LED display

产品特点 /Product features



喇叭形状 LED 显示屏广泛应用于覆盖室内方形或圆形柱子。通过定制异形模组，可以实现画面无缝拼接，通过特殊软件处理，可以实现画面不扭曲变形。喇叭屏可以作为室内装饰或广告播放。广泛应用于酒吧，商超等公共场所。

Horn shape or loud-speaker shape LED display is commonly used to wrap around inner square or round columns. By specially designed modules, it can be seamless joint. And by software processing, the video will not be distorted. It can be used for inner decoration or commercials. And it can be widely used for nightclubs, shopping malls and other public places.

LED DISPLAY CASE LED 显示屏案例



上海西岸智塔
Shanghai AI tower

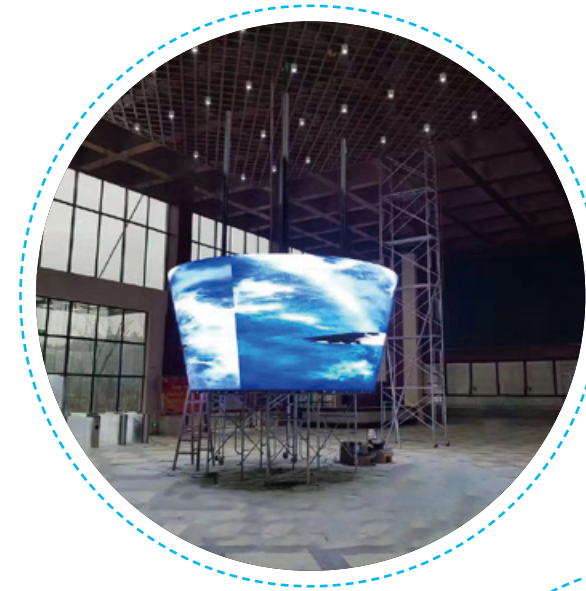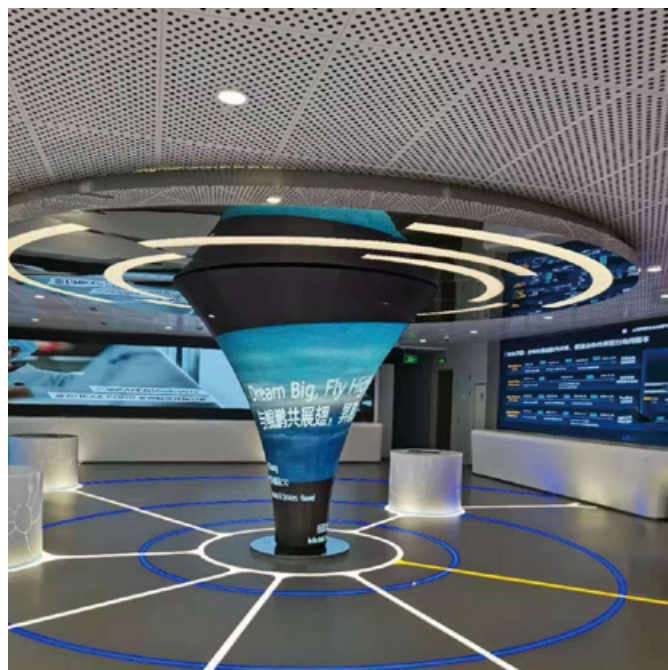

江西上饶龟峰旅游景点
Guifeng Tourist Attraction
in Shangrao, Jiangxi




瑞士 Migros 商场
Switzerland Migros mall



陕西商洛剧院
Shanxi Shangluo Theater



深圳卓悦中心 CGV 影城 Shenzhen Bonjour Center CGV Cinema

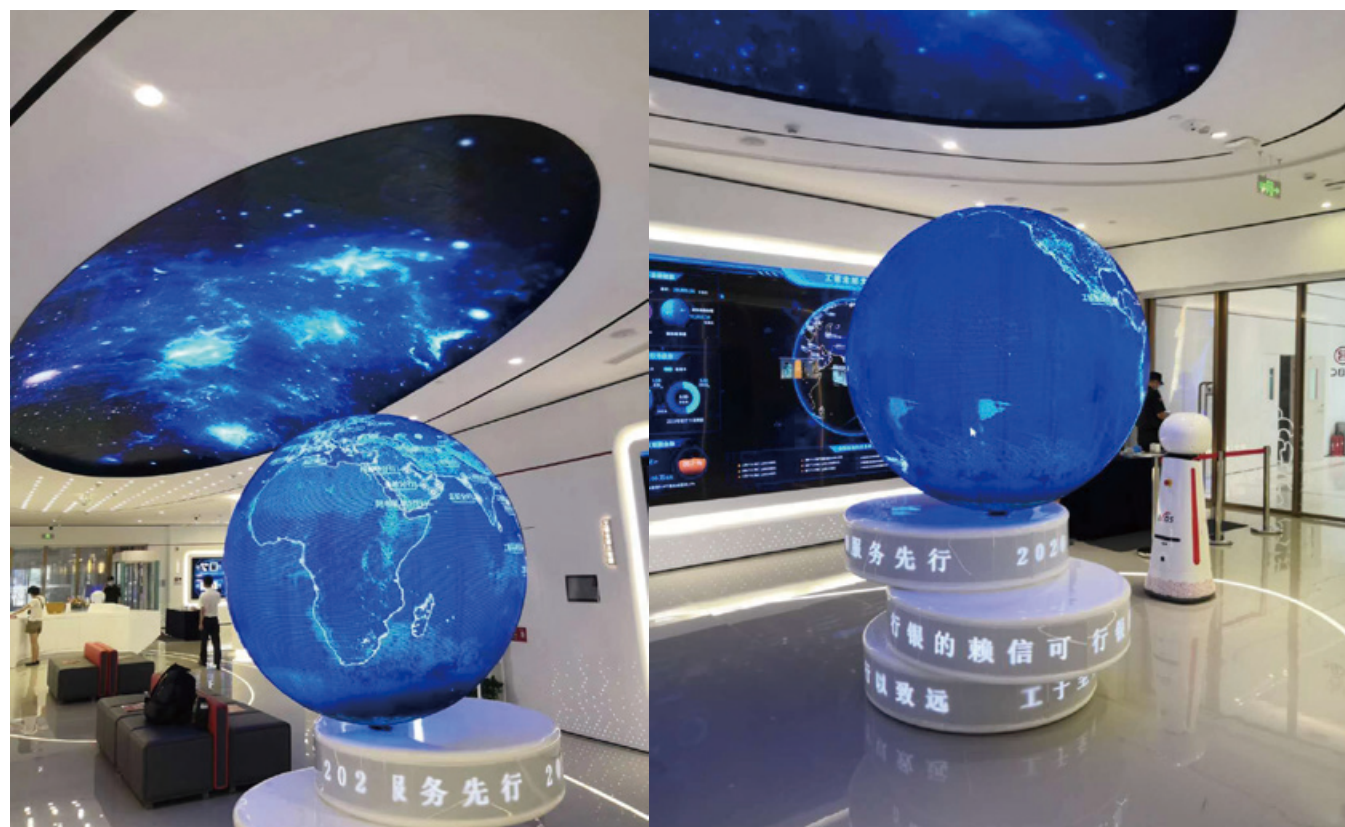

中国工商银行（北京金融街支行） Industrial and Commercial Bank of China(Beijing Financial Street Branch)



海南海口星轶影院 Xingyi Cinema in Haikou,Hainan



西藏拉萨藏游广场 Tibet Tour Square in Lhasa




武汉光谷智慧园 Wuhan Optics Valley Smart Park



北京辉煌假日度假酒店 Beijing glory Holiday Hotel




贵州黔南天文小镇 Astronomical Town, Qiannan, Guizhou



深圳腾讯大厦展厅
Shenzhen Tencent Building Exhibition Hall



泰国芭提雅风月街酒吧 Fengyue Street Bar,Pattaya,Thailand

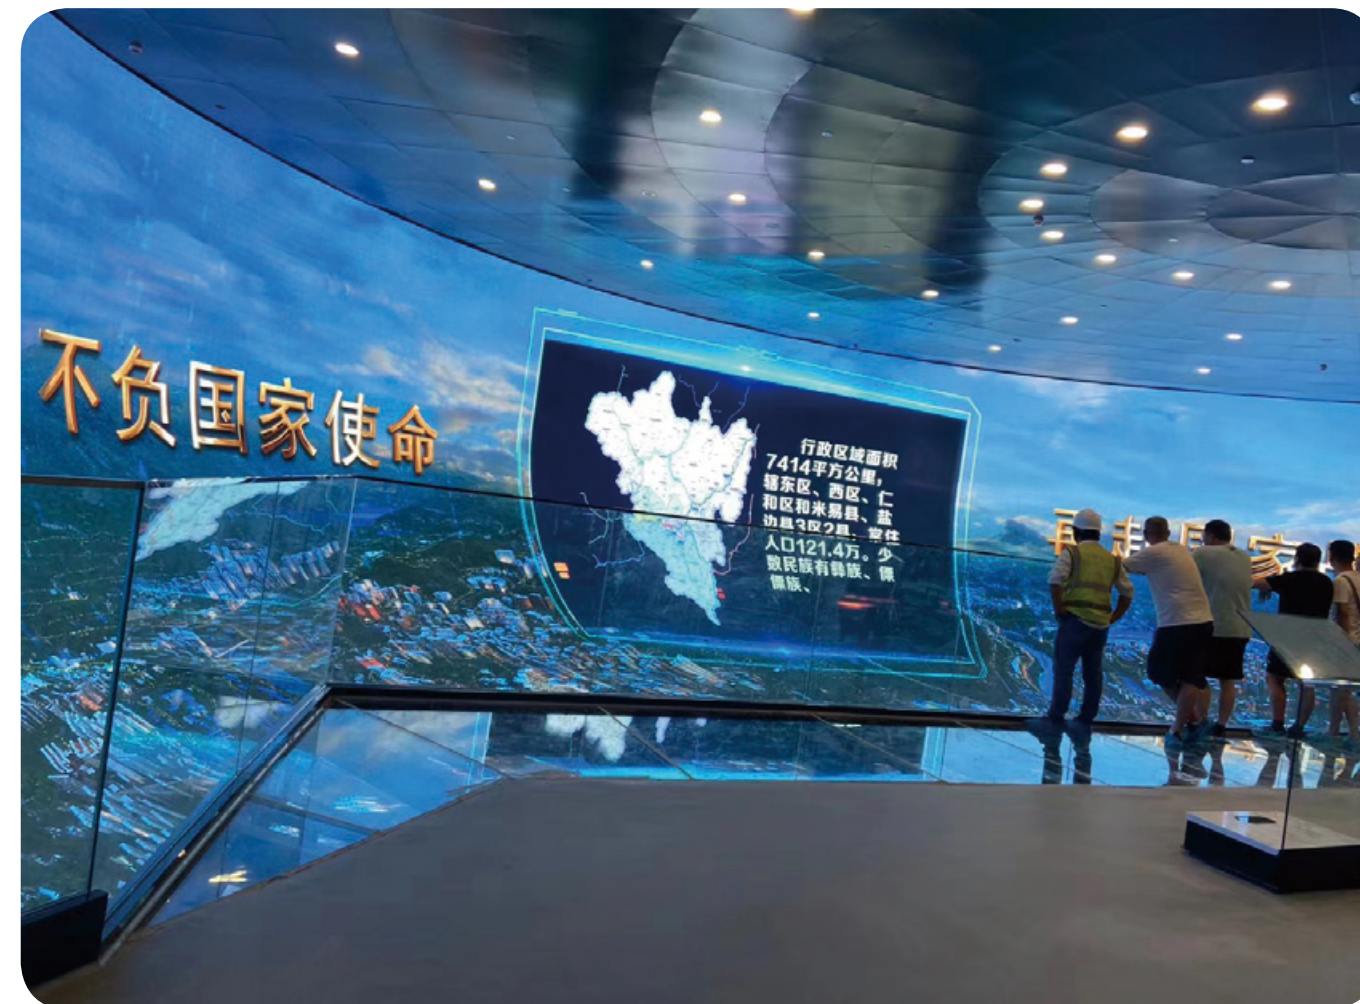

四川攀枝花攀西科技城
Panxi Science and Technology City,Panzhihua,Sichuan



中国银行（北京丰联广场大厦支行）
Bank of China(Beijing Fenglian Plaza Building Sub-branch)