



Front desk led display


Upgrade your corporate space with our Front Desk LED Display, designed for a variety of professional environments including company lobbies, meeting rooms, exhibition halls, and supermarket cashier areas. Customize sizes to fit your space, and benefit from easy mobility with our secure flight case packaging

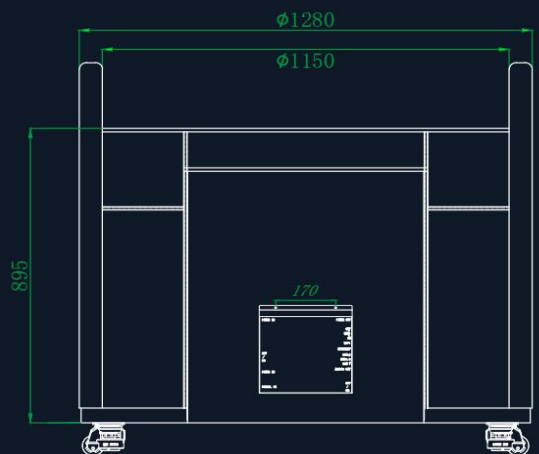

Product size

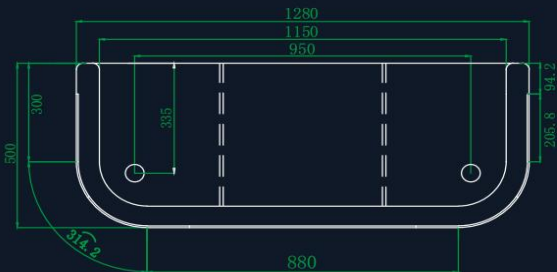

Flexible led module Advanced GOB technology makes the display waterproof, dust proof, and shockproof, ensuring longevity and durability.

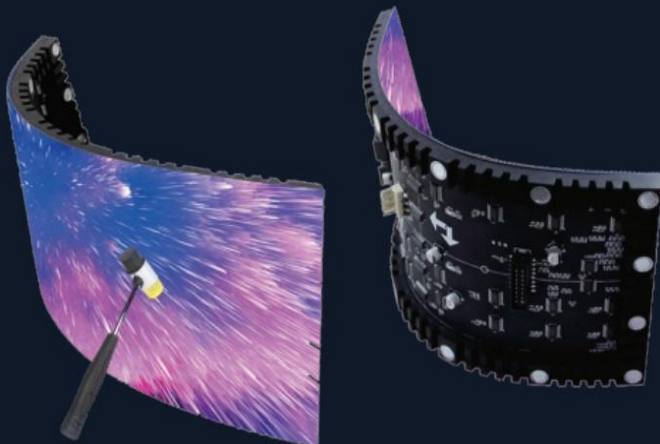

Designed for Diverse Applications

This LED display is perfectly suited for multiple applications. Whether you are welcoming clients at your company front desk, conducting presentations in a meeting room. Display feature products in an exhibition hall, or managing queues at a supermarket cashier, our solution is both practical and impressive.



Specification can be customized

| Model | P1.2(GOB) | P1.5(GOB) | P1.8(GOB) |
|----------------------------------|-----------|-----------------------------|-----------|
| Pixel Pitch(mm) | 1.25 | 1.57 | 1.86 |
| Pixel Density | 640,000 | 406,406 | 288,906 |
| Module Size(WxHxD) | | 320x 160x15mm | |
| LED Type | SMD 1010 | SMD 1212 | SMD 1212 |
| Module Resolution(dots) | 256x 128 | 204x 102 | 172x 86 |
| Module Arrangement (per cabinet) | | 6x6pcs | |
| Screen Size(WxH) | | 1920x960mm | |
| Cabinet Size(WxHxD) | | 1280x1095x500mm | |
| Cabinet Weight | | 97kg/pc | |
| Cabinet Resolution(dots) | 1536x768 | 1224x612 | 1032x516 |
| Scanning Mode | 62 | 51 | 43 |
| Best Viewing Distance(m) | ≥1.25 | ≥1.57 | ≥1.86 |
| Brightness | 600nits | 600nits | 600nits |
| Refresh Rate | 3,840Hz | 3,840Hz | 3,840Hz |
| Grey Scale | 16bit | 16bit | 16bit |
| Max./Avg.Power Consumption | | Max. 600w/pcs, Avg.200w/pcs | |
| Viewing Angle | | 160°(H)/160°(V) | |
| Working Voltage (input) | | AC110-240V@50/60Hz | |
| Operating Temperature | | -20~50°C, 10%-90RH | |
| IP Rating | | IP30 | |
| Maintenance | | Front Maintain | |
| Operate System | | Novastar | |
| Certification | | ETL, FCC, CCC, ROHS, CE | |

| Model | P2(GOB) | P2.5(GOB) |
|----------------------------------|---------|-----------------------------|
| Pixel Pitch(mm) | 2 | 2.5 |
| Pixel Density | 250,000 | 160,000 |
| Module Size(WxHxD) | | 320x 160x15mm |
| LED Type | SMD1515 | SMD1515 |
| Module Resolution(dots) | 160x 80 | 128x 64 |
| Module Arrangement (per cabinet) | | 6x6pcs |
| Screen Size(WxH) | | 1920x960mm |
| Cabinet Size(WxHxD) | | 1280x1095x500mm |
| Cabinet Weight | | 97kg/pc |
| Cabinet Resolution(dots) | 960x480 | 768x384 |
| Scanning Mode | 40 | 32 |
| Best Viewing Distance(m) | ≥2 | ≥2.5 |
| Brightness | 600nits | 600nits |
| Refresh Rate | 3,840Hz | 3,840Hz |
| Grey Scale | 16bit | 16bit |
| Max./Avg.Power Consumption | | Max. 600w/pcs, Avg.200w/pcs |
| Viewing Angle | | 160°(H)/160°(V) |
| Working Voltage (input) | | AC110-240V@50/60Hz |
| Operating Temperature | | -20~50°C, 10%-90RH |
| IP Rating | | IP30 |
| Maintenance | | Front Maintain |
| Operate System | | Novastar |
| Certification | | ETL, FCC, CCC, ROHS, CE |