




吊装式轨道 Suspended truss

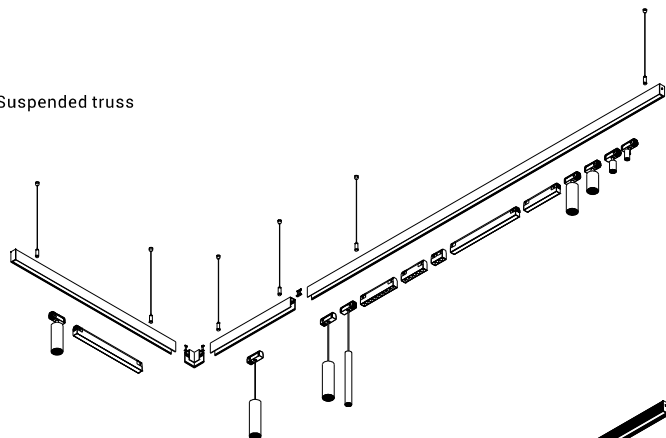


嵌入式轨道 Recessed track

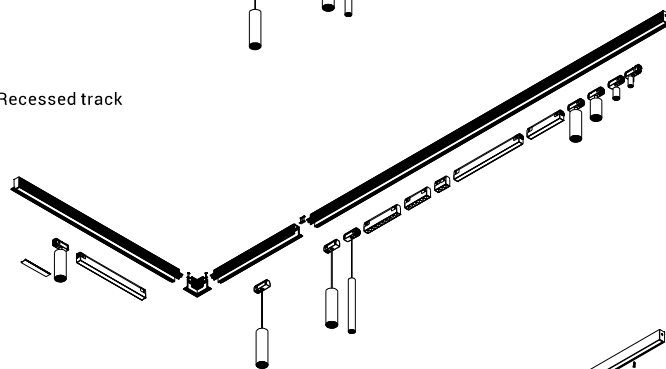

明装式轨道 Surface track

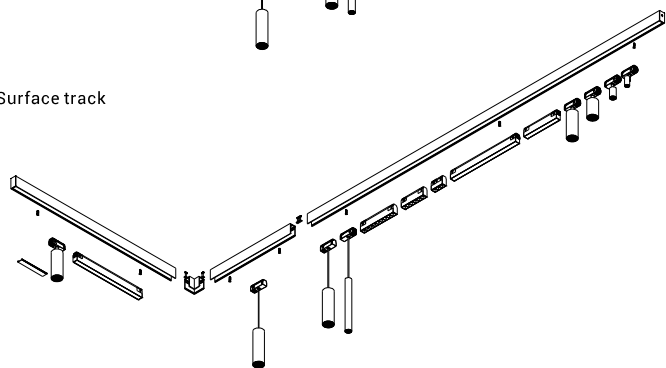

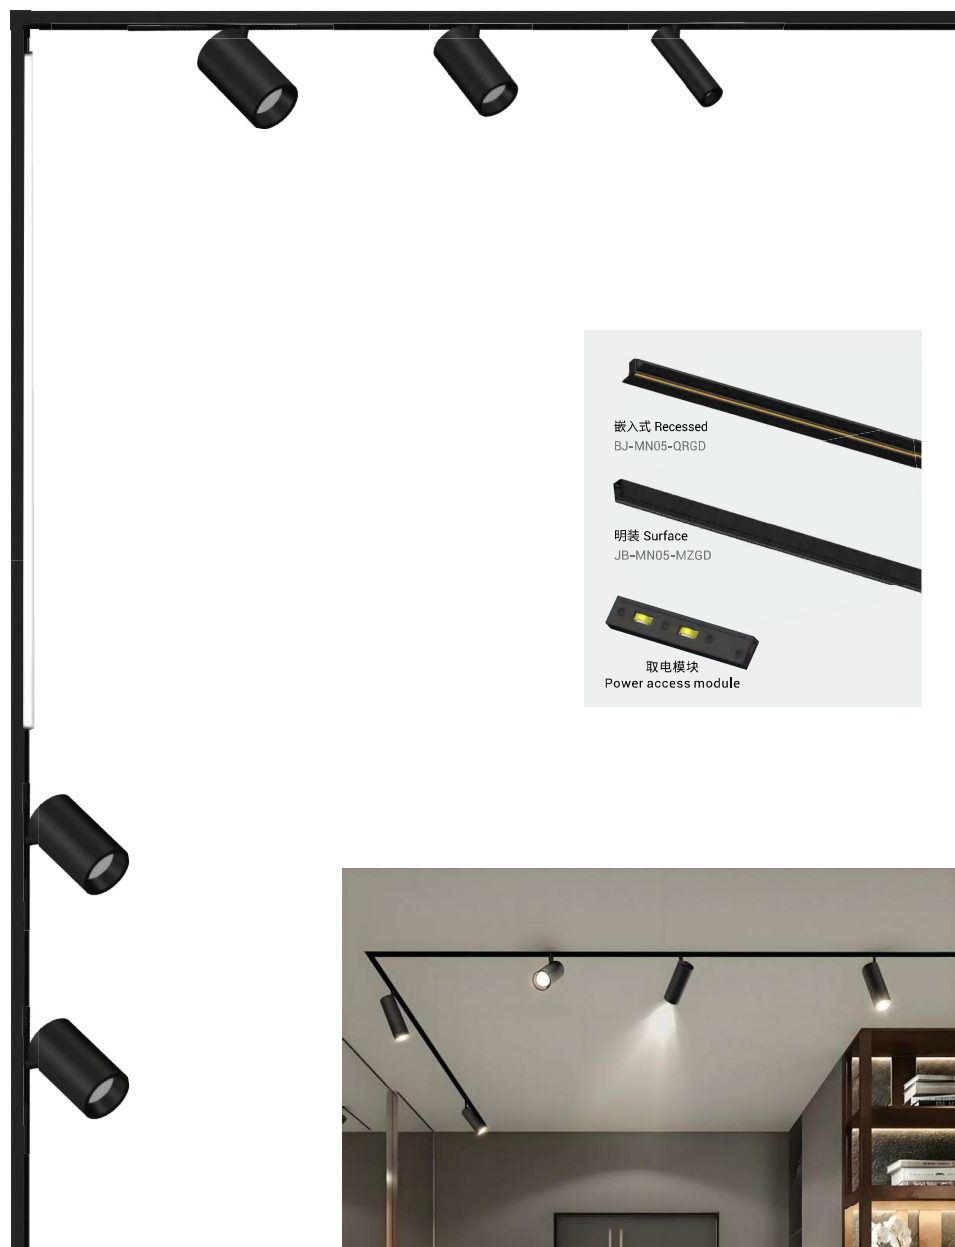

泛光灯/格栅灯 Flood / Grille Light - 15mm Series



BJ-15MNNL1514B



BJ-15MNZL1539B



BJ-15MNGS1514B




BJ-15MNZD1539B

产品参数/Product parameters

颜色(Color) ● ○

型号 (Model)	功率 (Watt)	色温 (CCT)	光束角 (Beam angle)	输入电压 (Input)	灯具尺寸 (Size)
BJ-15MNNL1514B	5W	3000K/4000K/5000K	110°	48V	L174•W15•H14mm
BJ-15MNZL1539B	5W	3000K/4000K/5000K	110°	48V	L173•W15•H39mm
BJ-15MNGS1514B	5W	3000K/4000K/5000K	50°	48V	L174•W15•H14mm
BJ-15MNZD1539B	5W	3000K/4000K/5000K	50°	48V	L173•W15•H39mm

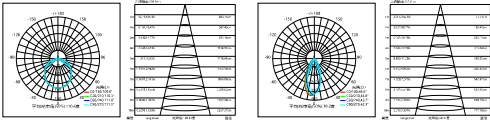

S系列 Magnetic Track System - 20mm



BJ-CX20MN-SD



BJ-CX20MN-SD



BJ-CX20MNB2225



BJ-CX20MNB2225

产品参数 /Product parameters

颜色 (Color) ☒ ☐

型号 (Model)	功率 (Watt)	色温 (CCT)	光束角 (Beam angle)	输入电压 (Input)	发光效率 (Lumen)	灯具尺寸 (Size)
BJ-CX20MN-SD12	12W	3000K/6000K	15°/24°/36°	48V	75lm/w	Ø45*130mm
BJ-CX20MN-SD20	20W	3000K/6000K	15°/24°/36°	48V	75lm/w	Ø60*148mm
BJ-CX20MNB2225-03	12W	3000K/6000K	120°	48V	75lm/w	L300*H22*W25mm
BJ-CX20MNB2225-06	24W	3000K/6000K	120°	48V	75lm/w	L600*H22*W25mm
BJ-CX20MNB2225-09	36W	3000K/6000K	120°	48V	75lm/w	L900*H22*W25mm
BJ-CX20MNB2225-12	48W	3000K/6000K	120°	48V	75lm/w	L1200*H22*W25mm



S系列 Magnetic Track System - 20mm



BJ-CX20MNGS2225



BJ-CX20MNGS2225



BJ-CX20MN-FXZDGS06



BJ-CX20MN-FXZDGS12

产品参数 /Product parameters

颜色 (Color) ☒ ☐

型号 (Model)	功率 (Watt)	色温 (CCT)	光束角 (Beam angle)	输入电压 (Input)	发光效率 (Lumen)	灯具尺寸 (Size)
BJ-CX20MNGS2225-06	6W	3000K/6000K	15°/24°/36°	48V	75lm/w	L113•H22•W25mm
BJ-CX20MNGS2225-12	12W	3000K/6000K	15°/24°/36°	48V	75lm/w	L223•H22•W25mm
BJ-CX20MNGS2225-18	18W	3000K/6000K	15°/24°/36°	48V	75lm/w	L338•H22•W25mm
BJ-CX20MNGS2225-24	24W	3000K/6000K	15°/24°/36°	48V	75lm/w	L452•H22•W25mm
BJ-CX20MNGS2225-36	36W	3000K/6000K	15°/24°/36°	48V	75lm/w	L652•H22•W25mm
BJ-CX20MNGS2225-54	54W	3000K/6000K	15°/24°/36°	48V	75lm/w	L995•H22•W25mm
BJ-CX20MN-FXZDGS06	6W	3000K/6000K	15°/24°/36°	48V	75lm/w	L113•H22•W55mm
BJ-CX20MN-FXZDGS12	12W	3000K/6000K	15°/24°/36°	48V	75lm/w	L226•H22•W55mm

